



VHF AND UHF DIGITAL/ANALOG TRANSCEIVERS

IC-F3261DT

VHF transceiver with full keypad

IC-F4261DT

UHF transceiver with full keypad

IC-F3261DS

VHF transceiver with simple keypad

IC-F4261DS

UHF transceiver with simple keypad

Fully Featured IDAS™ Digital Handheld with Built-in GPS and Waterproof Protection

IDAS™
ICOM DIGITAL ADVANCED SYSTEM

Built-in GPS Receiver*

Man Down Function*

IP67 Waterproof Protection

800mW Audio Output Power

IDAS™ NXDN™ Features

**512 Memory Channels
with 128 Zones**

(* Depending on version)



IDAS™: Better, Improved & Enhanced

IP67 Dust-tight & Waterproof Protection



The IC-F3261D series provides rugged protection against dust and water that is equivalent to IP67. The radio can withstand 1m depth of water for 30 minutes.

Man Down and Lone Worker Functions for Emergency Call

The man down function* automatically sends an emergency signal when the transceiver is left in a horizontal position. The lone worker function also can transmit an emergency signal when the radio is not operated for a preset period. These emergency signals can be sent with GPS position data* to alert your co-workers or dispatcher to any potential trouble.

* Depending on version.

800mW (typ.) Audio Output Power



The built-in BTL amplifier doubles the audio output power and the large 40mm speaker delivers loud 800mW (typ.) audio to receive all calls under noisy environments.



IC-F3261DT
(Full keypad)



IC-F4261DS
(Simple keypad)

IDAS™ Features

The IC-F3261D series provides NXDN™ CAI-based IDAS digital mode operation. It is also compatible with NXDN™ Type-D multi-site trunking. The following IDAS features are programmable.

- Individual/group call
- Individual ID and talkgroup ID memories
- Status message • SDM (Short Data Message)
- GPS • Stun, kill and revive
- Radio check • Remote monitor
- Call alert • Call log
- Emergency • Digital voice scrambler
- Block decode • RAN (Radio Access Number)

Built-in 2-Tone and 5-Tone*

2-Tone and 5-Tone signalings give you selective calling, quiet stand-by and other convenient functions. The radio stun and kill functions disable a radio over the air and the revive function restores the stunned radio.

MDC 1200 Compatible*

The built-in MDC signaling provides the following selective calling and ANI features.

- PTT ID • SelCall • Radio check
- Radio stun/revive • 500 aliases
- Status message/request • Call alert
- Emergency, emergency mic monitoring

Scan Features

The IC-F3261D series can detect both analog and IDAS conventional signals and automatically selects the transmission mode to reply to the received call.

Built-in Voice Scrambler

The built-in inversion voice scrambler* provides secure conversation in analog mode. When using IDAS digital mode, the digital voice scrambler provides a 15-bit key (about 32,000 codes) as standard.

* Inversion voice scrambler is not compatible with UT-109R/UT-110R voice scrambler.



Built-in GPS Receiver*

Your current position data can be attached to a voice or data (SDM, status or emergency signal) transmission and can be sent to dispatch stations*.



* Depending on version. * To show the received position data, an external PC application is required.

14-pin Accessory Connector

The new 14-pin accessory connector enhances audio output capabilities with the built-in BTL amplifier. The optional HM-184 speaker - microphone provides a 1000mW (typ.) audio output for loud and clear communication.



Large Full Dot-matrix LCD

Using a large full dot-matrix LCD (32 x 18 mm), the IC-F3261D series shows two lines of easy to read text messages. The bottom row shows assigned functions to the [P0] to [P3] buttons.

Long Lasting Battery Life

GPS type	Digital mode	Analog mode
Built-in GPS type	10.5 hours (approx.)	11 hours (approx.)
Non GPS type	12 hours (approx.)	12.5 hours (approx.)


* Typical operation in 5:5:90 duty cycle, power save on.

Other Features

- 512 memory channels with 128 zones
 - 5W output power both in VHF and UHF
 - Basic LTR™ mode operation*
 - CTCSS/DTCS encoder/decoder*
 - MIL-STD 810 G rugged construction
 - 8 DTMF autodial memories
 - Tactical group function
 - Busy channel lockout, repeater lockout
 - Power on password
 - Time-out timer • Talk around function
 - Low battery alert • Escalating alarm
 - Surveillance function
- (* = Analog mode only)


IDAS™ expands coverage and capacity

Conventional

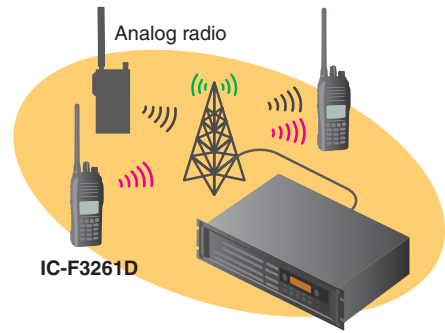


- 6.25kHz digital migration
- Digital/analog mixed mode operation

Multi-site Conventional

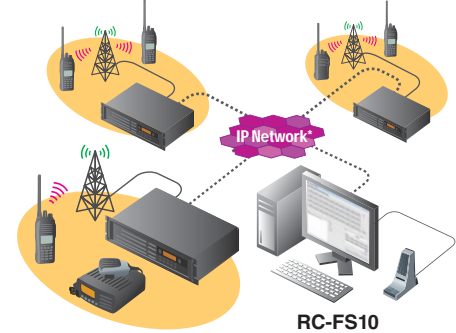


- Up to 16 IDAS repeater sites connection over an IP network.
- RC-FS10, PC dispatch station

Type-D Single Site Trunking

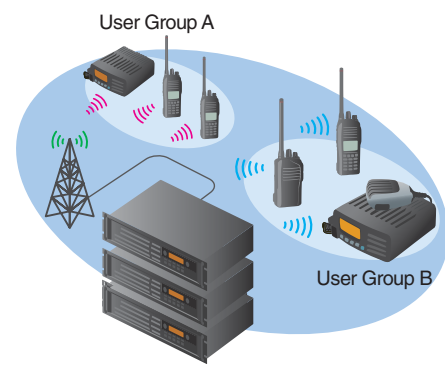

- Distributed channel system which does not use a dedicated control channel
- Up to 30 channels per system
- Up to 2,000 individual IDs and up to 2,000 group IDs

Type-D Multi-site Trunking

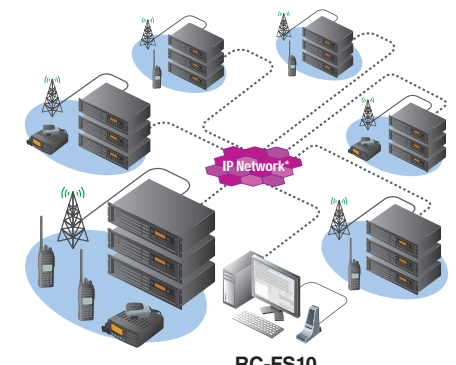

- Distributed channel system
- Up to 30 channels per site and up to 48 sites connection over an IP network
- Up to 60,000 individual IDs and 60,000 group IDs with fleet management
- Automatic site roaming
- ESN authentication
- RC-FS10 PC dispatch

All advantages shown represent possible system configurations. Ask your Icom dealer to configure an IDAS system that works best for you. *Note: Private IP Network or VPN Tunnels through the Internet with static endpoints.

VHF DIGITAL/ANALOG TRANSCEIVERS

IC-F3261DT
IC-F3261DS

UHF DIGITAL/ANALOG TRANSCEIVERS

IC-F4261DT
IC-F4261DS

SPECIFICATIONS

	IC-F3261DT/DS	IC-F4261DT/DS
GENERAL		
Frequency coverage	136–174MHz	400–470MHz 450–512MHz
Number of channels	512 channels/128 zones	
Type of emission	11K0F3E/4K00F1E/F1D	
Channel spacing	12.5/6.25kHz	
Power supply requirement	7.5V DC nominal	
Current drain (approx.)		
Tx High (at 5W)	1.7A	1.8A
Rx Rated output/Standby	550mA/160mA	550mA/160mA
Antenna impedance	50Ω	
Operating temperature range	-30°C to +60°C; -22°F to +140°F (Radio specifications)	
Dimensions (W×H×D)	53.5×142.7×39.5 mm; 2.11×5.62×1.56 in (Projections not included)	
Weight (approx.)	400g; 14.1oz (With BP-232WP, MB-94R & FA-SC57U)	
TRANSMITTER		
Output power (at 7.5V DC)	5W, 2W, 1W (Hi, L2, L1)	
Max. frequency deviation	±2.5kHz (Narrow)	
Frequency stability	±1.0ppm	
Spurious emissions	78dB typ.	
FM Hum and noise	43dB typ. (Narrow)	40dB typ. (Narrow)
Audio harmonic distortion	1.5% typ. (AF 1kHz 40% deviation)	
FSK error	2.0% typ.	
Ext. microphone connector	14-pin multi-connector/2.2kΩ	
RECEIVER		
Sensitivity (Analog)	0.23μV typ. (at 12dB SINAD)	
(Digital)	0.20μV typ. (at 5% BER)	
Adjacent channel selectivity	68/60dB typ. (Narrow, digital)	
Spurious response rejection	76dB typ.	
Intermodulation rejection	75/66dB typ. (Narrow, digital)	
Hum and noise	47dB typ. (Narrow)	43dB typ. (Narrow)
Audio output power	800mW typ. (Internal SP, 12Ω load)	
(at 5% distortion)	1000mW typ. (External SP, 8Ω load)	
Ext. speaker connector	14-pin multi-connector/8Ω	
GPS (Depending on version)		
Receiver channels	12 channels	
Time to first fix (cold start)	36 seconds typ. (at open sky)	
Horizontal accuracy	5m (at open sky)	

Measurements made in accordance with EIA/TIA-603. All stated specifications are subject to change without notice or obligation. * 25kHz bandwidth is no longer available for FCC Part 90 licensees for USA versions. Ask your dealer if you need 25kHz bandwidth.

Applicable U.S. Military Specifications & IP Rating

Standard	MIL 810G	
	Method	Procedure
Low Pressure	500.5	I, II
High Temperature	501.5	I, II
Low Temperature	502.5	I, II
Temperature Shock	503.5	I-C
Solar Radiation	505.5	I
Rain Blowing/Drip	506.5	I, III
Humidity	507.5	II
Salt Fog	509.5	-
Dust Blowing	510.5	I
Immersion	512.5	I
Vibration	514.6	I
Shock	516.6	I, IV

Also meets equivalent MIL-STD-810-C, -D, -E and -F.

Ingress Protection Standard (IC-F3261D/F4261D, BP-232WP and HM-184)
Dust & Water IP67 (Dust-tight and waterproof protection)

Supplied accessories: (May differ according to version)
• Battery pack, BP-232WP • Belt clip, MB-94R • Antenna

OPTIONS

Some options may not be available in some countries. Please ask your dealer for details.

BATTERY PACK AND CASES



BP-232WP Li-Ion, 2250mAh (min.), 2300mAh (typ.)
BP-240 6 × LR03 (AAA) cells
BP-261 6 × LR6 (AA) cells

REGULAR CHARGER



BC-171

Charges the BP-232WP in 8–10 hours (approx.).

RAPID CHARGER



BC-160

Charges the BP-232WP in 3 hours (approx.).

RAPID CHARGER



BC-119N

Charges the BP-232WP in 3 hours (approx.).

MULTI-CHARGER*2



BC-197

*1 BC-145/BC-147SA for 120V AC. SE for 230V AC. SV for 240V AC. BC-145SUK for 230V AC.
*2 The combination of **BC-121N** Multi-charger and **AD-106** Charger adaptor (6 pieces required) is also available.

CHARGER BRACKET



MB-130

For use with BC-160

SPEAKER-MICROPHONE



HM-184/H

HEADSETS and PLUG ADAPTER CABLE



HS-94 Earhook type

HS-95 Behind-the-head type

HS-97 Throat type

VS-4MC Required when using any of these headsets

BELT CLIPS



MB-93

MB-94

MB-94R

LEATHER BELT HANGERS



MB-96N

MB-96F

MB-96FL

CIGARETTE LIGHTER CABLE & POWER SUPPLY CABLES



CP-23L For use with BC-119N and BC-160

OPC-515L For use with BC-119N

OPC-656 For use with BC-197 and BC-121N

ACC ADAPTOR



AD-118 For use with Hirose Plug Accessory

ANTENNAS

- FA-SC25V: 136–150MHz
- FA-SC55V: 150–174MHz
- FA-SC25U: 400–430MHz
- FA-SC57U: 430–470MHz
- FA-SC72U: 470–520MHz

STUBBY ANTENNAS

- FA-SC56VS: 150–162MHz
- FA-SC57VS: 160–174MHz
- FA-SC73US: 450–490MHz

HIGH GAIN ANTENNAS

- FA-SC62V: 150–160MHz
- FA-SC63V: 155–165MHz

CUT ANTENNAS

- FA-SC61VC: 136–174MHz
- FA-SC61UC: 380–520MHz

ZONE COPY CABLES

- OPC-1870: Handheld to handheld cable
- OPC-1871: Handheld to mobile cable

CHARGER ADAPTER

- AD-122 for BP-232WP
- AD-122 charger adapter is supplied with the BC-197, depending on BC-197's version.

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in the United States, the United Kingdom, Germany, France, Spain, Russia and/or other countries. IDAS and IDAS logo are trademarks of Icom Incorporated. NXDN is a trademark of Icom Incorporated and JVC KENWOOD Corporation. LTR is a trademark of E.F. Johnson Technologies Inc. All other trademarks are the properties of their respective holders.

Icom Inc.

1-1-32, Kami-minami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icom.co.jp/world

Count on us!

Icom America Inc.

12421 Willows Road NE,
Kirkland, WA 98034, U.S.A.
Phone: +1 (425) 454-8155
Fax: +1 (425) 454-1509
E-mail: sales@icomamerica.com
URL: <http://www.icomamerica.com>

Icom Canada

Glenwood Centre #150-6165 Highway 17A,
Delta, B.C., V4K 5B8, Canada
Phone: +1 (604) 952-4266
Fax: +1 (604) 952-0090
E-mail: info@icomcanada.com
URL: <http://www.icomcanada.com>

Icom Brazil

Rua Itororó, 444 Padre Eustáquio
Belo Horizonte MG,
CEP: 30130-150, Brazil
Phone: +55 (31) 3582 8847
Fax: +55 (31) 3582 8987
E-mail: sales@icombrasil.com

Icom (Europe) GmbH

Communication Equipment
Auf der Krautweide 24
65812 Bad Soden am Taunus, Germany
Phone: +49 (6196) 76685-0
Fax: +49 (6196) 76685-50
E-mail: info@icom-europe.com
URL: <http://www.icomeurope.com>

Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer"
Bajos A 08174, Sant Cugat del Valles,
Barcelona, Spain
Phone: +34 (93) 590 26 70
Fax: +34 (93) 589 04 46
E-mail: icom@icomspain.com
URL: <http://www.icomspain.com>

Icom Polska Sp. z o.o.

80-286 Gdansk, Jaskowa Dolina St. 75, Poland
Phone: +48 (58) 551 0484
Fax: +48 (58) 551 4720
E-mail: icompolksa@icompolksa.com.pl
URL: <http://www.icompolksa.com.pl>

Icom (UK) Ltd.

Blacksole House, Altria Park,
Herne Bay, Kent, CT6 6GZ, U.K.
Phone: +44 (0) 1227 741741
Fax: +44 (0) 1227 741742
E-mail: info@icomuk.co.uk
URL: <http://www.icomuk.co.uk>

Icom France s.a.s.

Zac de la Plaine,
1 Rue Brindejonc des Moulinais, BP 45804,
31505 Toulouse Cedex 5, France
Phone: +33 (5) 61 36 03 03
Fax: +33 (5) 61 36 03 00
E-mail: icom@icom-france.com
URL: <http://www.icom-france.com>

Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road,
80-286 Gdansk, Jaskowa Dolina St. 75, Poland
Phone: +61 (03) 9549 7500
Fax: +61 (03) 9549 7505
E-mail: sales@icom.net.au
URL: <http://www.icom.net.au>

Icom New Zealand

146A Harris Road, East Tamaki,
Auckland, New Zealand
Phone: +64 (09) 274 4062
Fax: +64 (09) 274 4708
E-mail: inquiries@icom.co.nz
URL: <http://www.icom.co.nz>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone: +886 (02) 2559 1899
Fax: +886 (02) 2559 1874
E-mail: sales@asia-icom.com
URL: <http://www.asia-icom.com>

Shanghai Icom Ltd.

No.101, Building 9, Caifuxingyuan Park,
No.188 Maoling Road, Chedun Town,
Songjiang District, Shanghai, 201611, China
Phone: +86 (021) 6153 2768
Fax: +86 (021) 5765 9987
E-mail: bjicom@bjicom.com
URL: <http://www.bjicom.com>

Your local distributor/dealer: